


FORD STEEL
GOOSENECK BODIES

KNAPHEIDE
SINCE 1848



FORD
**STEEL GOOSENECK
BODIES**

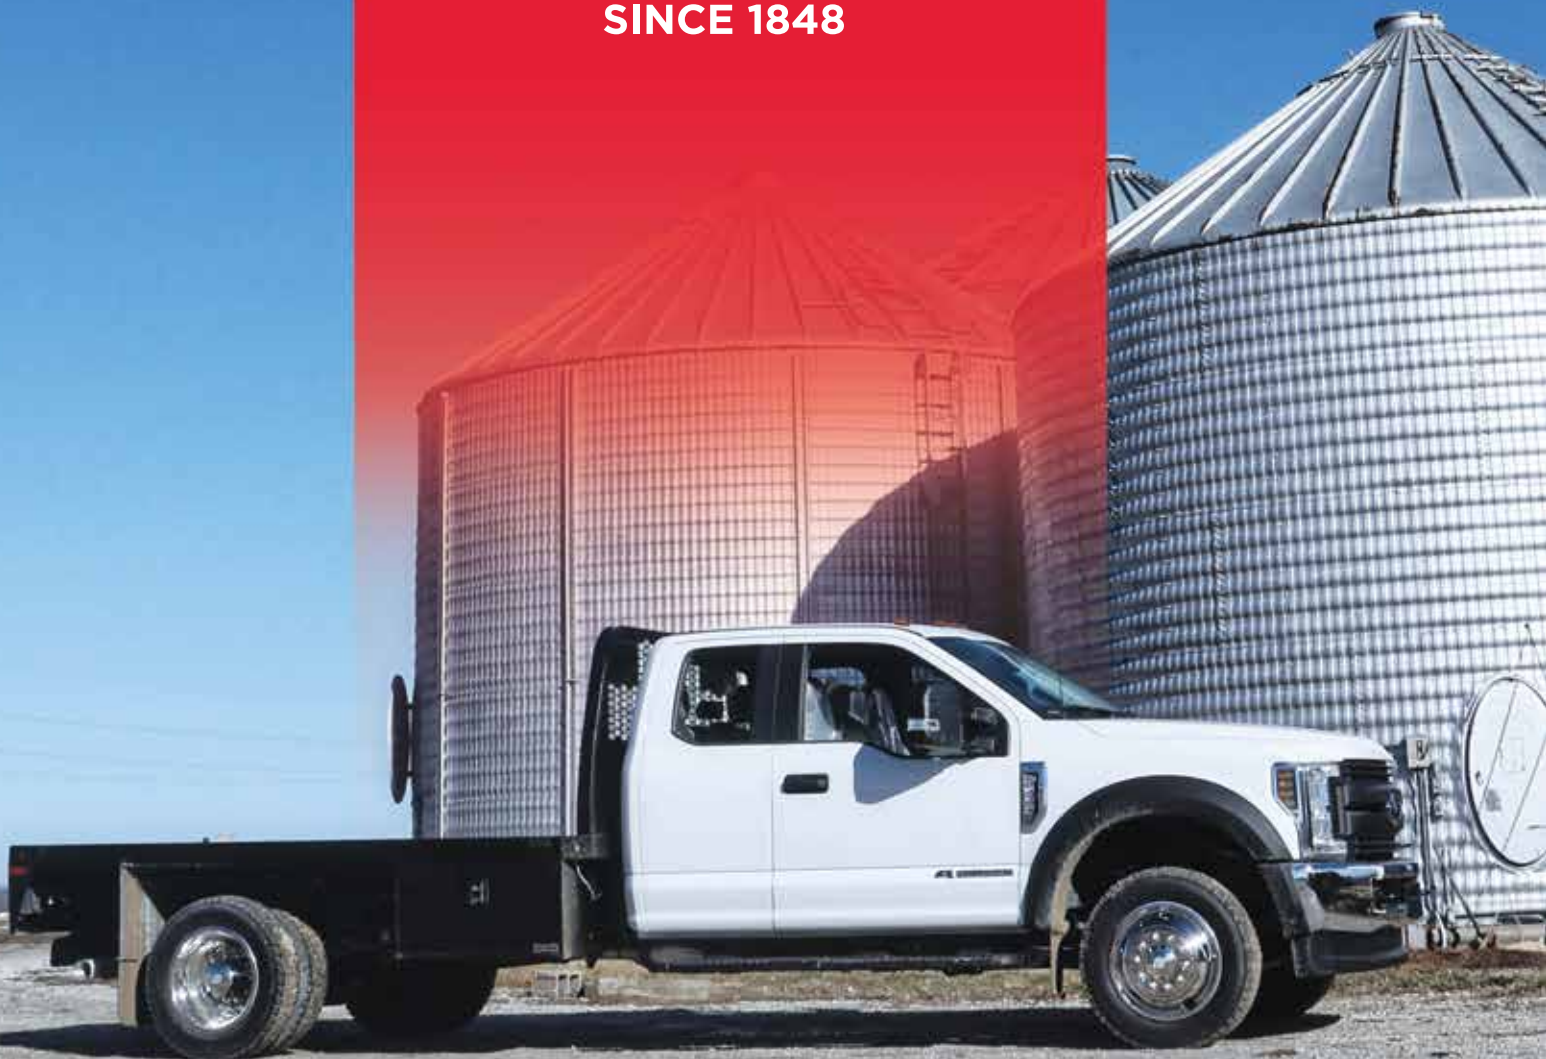

KNAPHEIDE

STEEL GOOSENECK BODIES



STEEL GOOSENECK BODIES

Versatility with storage solutions to meet every need, Knapheide Gooseneck Bodies are an easy choice. Rugged construction, enhanced styling and secure storage give you a body that can haul it all.

Reliable offerings range from the mid-level PGTB, skirted PGTC, the deluxe PGTD and PGTE.

REQUEST A QUOTE



Visit [knapheide.com/quote](https://www.knapheide.com/quote) and fill out the form to receive a quote and additional product information.



GOOSENECK TURNOVERBALL HITCH

A B&W Turnoverball®, rated at 30,000 lbs. gross trailer weight, with 7,500 lb. tongue weight. Currently in all PGT models.

POPULAR VOCATIONS



CONSTRUCTION



AGRICULTURE



LANDSCAPING/
TREE CARE



OIL/MINING/GAS

To learn more visit www.knapheide.com

PGTB PRODUCT FEATURES

- A RUB RAILS**
installed on both sides of bodies for strap, side and stake pocket protection
- B RUGGED 1/8" THICK TREAD PLATE FLOOR**
- C B&W TURNOVERBALL®**
rated at 30,000 lbs. gross trailer weight, with 7,500 lb. tongue weight
- D BOLT ON RECEIVER HITCH**
Choose from 16K or 21K hitch, ordered separately to ship loose
- E FORMED, INTEGRATED BULKHEAD**
with stylized screened window and tapered design for improved visibility
- F 7-WAY TRAILER PLUG**
at rear of body
- G DURABLE OVEN-CURED COAT**
finish painted black
- H ALL LED CLEARANCE AND MARKER LIGHTS**
for visibility and added safety
- I INTEGRATED OVAL LED B/U AND S/T/T LIGHTS**
included in bulkhead and rear skirt
- J SAFETY CHAIN ATTACHMENT POINTS**
included with gooseneck hitch



FEATURES NOT SHOWN

ELECTRODEPOSITION PRIME-PAINT SYSTEM
provides superior corrosion resistance

12-GAUGE FORMED CROSS SILLS

INTEGRATED DRIVER SIDE FUEL FILL CUP

PGTC PRODUCT FEATURES

- A SKIRTED GOOSENECK STYLING**
with integrated front and rear toolboxes
- B RUB RAILS**
installed on both sides of bodies for strap, side and stake pocket protection
- C RUGGED 1/8" THICK TREAD PLATE FLOOR**
with 6" structural channel long sills (4" on 8' models)
- D B&W TURNOVERBALL®**
rated at 30,000 lbs. gross trailer weight, with 7,500 lb. tongue weight
- E BOLT ON RECEIVER HITCH**
Choose from 16K or 21K hitch, ordered separately to ship loose
- F 7-WAY TRAILER PLUG**
at rear of body
- G SAFETY CHAIN ATTACHMENT POINTS**
included with gooseneck hitch
- H DURABLE OVEN-CURED COAT**
finish painted black
- I ALL LED CLEARANCE AND MARKER LIGHTS**
for visibility and added safety
- J INTEGRATED OVAL LED B/U AND S/T/T LIGHTS**
included in bulkhead and rear skirt
- K CONTINUOUS STAINLESS STEEL HINGES**
are pry-proof and corrosion-resistant
- L DOUBLE PANELED DOORS**
consist of 20-gauge, two sided A-40 galvalume steel
- M AUTOMOTIVE QUALITY, ROTARY-STYLE LATCHES**
make opening and closing easy



FEATURES NOT SHOWN

12-GAUGE FORMED CROSS SILLS

NEOPRENE DOOR SEALS
protect compartments from the weather

INTEGRATED DRIVER SIDE FUEL FILL CUP

ADJUSTABLE SECURITY RING STRIKERS
provide a weather-tight seal

ELECTRODEPOSITION PRIME-PAINT SYSTEM
provides superior corrosion resistance

MAINTENANCE-FREE, DOUBLE-SPRING OVER-CENTER DOOR RETAINER
eliminates involuntary door swing

INTERIOR COVER
protects internal latch from damage

PGTD PRODUCT FEATURES

- A DOUBLE PANELED DOORS** consist of 20-gauge, two sided A-40 galvanized steel
- B FLIP TOP COMPARTMENTS** 8" deep and with exterior release latch. Flip tops utilize nitrogen gas struts for smooth opening and closing
- C RUGGED 1/8" THICK TREAD PLATE FLOOR**
- D 36" HIGH FRONT COMPARTMENTS** each with 250 lb. capacity shelves
- E BOLT ON RECEIVER HITCH** Choose from 16K or 21K hitch, ordered separately to ship loose
- F FORMED, INTEGRATED BULKHEAD** with stylized screened window and tapered design for improved visibility
- G 7-WAY TRAILER PLUG** at the rear of the body
- H DURABLE OVEN-CURED COAT** finish painted black
- I ALL LED CLEARANCE AND MARKER LIGHTS** for visibility and added safety

- J UPGRADED REAR MOUNT LIGHTING SYSTEM** features LED S/T/T and B/U, LED strobe option* with (8) selectable patterns, and built-in reflectivity for additional safety**
*Additional wire harness required for strobe lights
**Lights covered by 3-year limited warranty
- K CONTINUOUS STAINLESS STEEL HINGES** are pry-proof and corrosion-resistant
- L AUTOMOTIVE QUALITY, ROTARY-STYLE LATCHES** make opening and closing easy
- M FULL HEIGHT SLAM TAILGATE** with center mounted release handle



- N B&W TURNOVERBALL®** rated at 30,000 lbs. gross trailer weight, with 7,500 lb. tongue weight
- O GALVANNEAL FENDERETTES** are welded on
- P 7" DEEP REAR STEP** makes accessing cargo area safe and easy

FEATURES NOT SHOWN

ELECTRODEPOSITION PRIME-PAINT SYSTEM
provides superior corrosion resistance

INTERIOR COVER
protects internal latch from damage

NEOPRENE DOOR SEALS
protect compartments from the weather

250-LB. CAPACITY SHELVES MADE OF SPANGLED STEEL
(2 in each front vertical compartment)

MAINTENANCE-FREE, DOUBLE-SPRING OVER-CENTER DOOR RETAINER
eliminates involuntary door swing

ADJUSTABLE SECURITY RING STRIKERS
provide a weather-tight seal

12-GAUGE FORMED CROSS SILLS
3" formed

PGTE PRODUCT FEATURES

- A SKIRTED GOOSENECK STYLING** with integrated front and rear toolboxes
- B 36" HIGH FRONT COMPARTMENTS** each with 250 lb. capacity shelves
- C RUB RAILS** installed on both sides of bodies for strap, side and stake pocket protection
- D RUGGED 1/8" THICK TREAD PLATE FLOOR**
- E B&W TURNOVERBALL®** rated at 30,000 lbs. gross trailer weight, with 7,500 lb. tongue weight
- F BOLT ON RECEIVER HITCH** Choose from 18K or 21K hitch, ordered separately to ship loose
- G 7-WAY TRAILER PLUG** at the rear of the body

- H SAFETY CHAIN ATTACHMENT POINTS** included with gooseneck hitch
- I DURABLE OVEN-CURED COAT** finish painted black
- J ALL LED CLEARANCE AND MARKER LIGHTS** for visibility and added safety
- K INTEGRATED OVAL LED B/U AND S/T/T LIGHTS** included in bulkhead and rear skirt

- L CONTINUOUS STAINLESS STEEL HINGES** are pry-proof and corrosion-resistant
- M DOUBLE PANELED DOORS** consist of 20-gauge, two sided A-40 galvanized steel
- N AUTOMOTIVE QUALITY, ROTARY-STYLE LATCHES** make opening and closing easy



FEATURES NOT SHOWN

ELECTRODEPOSITION PRIME-PAINT SYSTEM
provides superior corrosion resistance

INTERIOR COVER
protects internal latch from damage

NEOPRENE DOOR SEALS
protect compartments from the weather

MAINTENANCE-FREE, DOUBLE-SPRING OVER-CENTER DOOR RETAINER
eliminates involuntary door swing

ADJUSTABLE SECURITY RING STRIKERS
provide a weather-tight seal

12-GAUGE FORMED CROSS SILLS

POPULAR OPTIONS



PGTB / PGTC



ROUGHNECK CONTRACTOR PACKAGE

Underbody toolboxes do not apply for PGTC



4" REMOVABLE SIDE BOARDS



ABOVE BODY AND UNDERBODY TOOLBOXES

Underbody toolboxes do not apply for PGTC



3/16" TREAD PLATE FLOOR

POPULAR OPTIONS

PGTD



3/16" TREAD PLATE FLOOR



ADDITIONAL ALUMINUM
TREAD PLATE OVERLAY

PGTE



3/16" TREAD PLATE FLOOR



6" STAKE RACK SET



PGTD / PGTE



CTECH DRAWER SETS



CARGO D-RINGS



LED COMPARTMENT LIGHTS




POWER LOCKS

MODEL OPTIONS


PGTB

MODEL	LENGTH	WIDTH	WEIGHT	APPLICATION	SWING RADIUS	LONG SILL SPACING
PGTB-738-F	7'3"	84"	749 lb.	40" CA SRW	60"	38"
PGTB-868-F	8'6"	84"	844 lb.	56" CA SRW	60"	38"
PGTB-968	9'6"	84"	927 lb.	60" CA SRW	67"	34"
PGTB-86-F	8'6"	96"	904 lb.	56" CA DRW	63"	38"
PGTB-96	9'6"	96"	989 lb.	60" CA DRW	70"	34"
PGTB-116	11'6"	96"	1,144 lb.	84" CA DRW	70"	34"

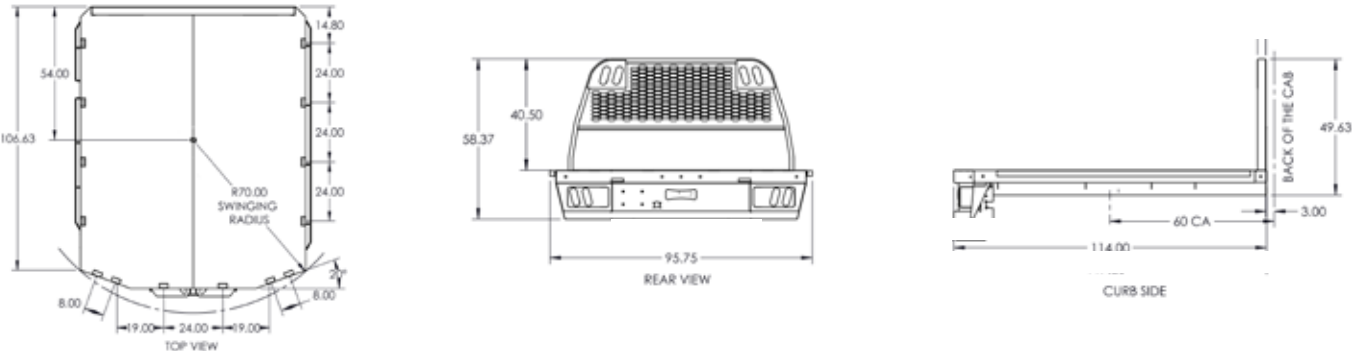


PGTD

MODEL	LENGTH	WIDTH	WEIGHT	APPLICATION	SWING RADIUS	LONG SILL SPACING
PGTD-718-F	7'1"	80"	1,208 lb.	40" CA SRW	62"	38"
PGTD-848-F	8'4"	80"	1,367 lb.	56" CA SRW	61"	38"
PGTD-84-F	8'4"	96"	1,490 lb.	56" CA DRW	64"	38"
PGTD-948	9'4"	80"	1,510 lb.	60" CA SRW	72"	34"
PGTD-94	9'4"	96"	1,641 lb.	60" CA DRW	72"	34"
PGTD-114	11'4"	96"	1,969 lb.	84" CA DRW	72"	34"

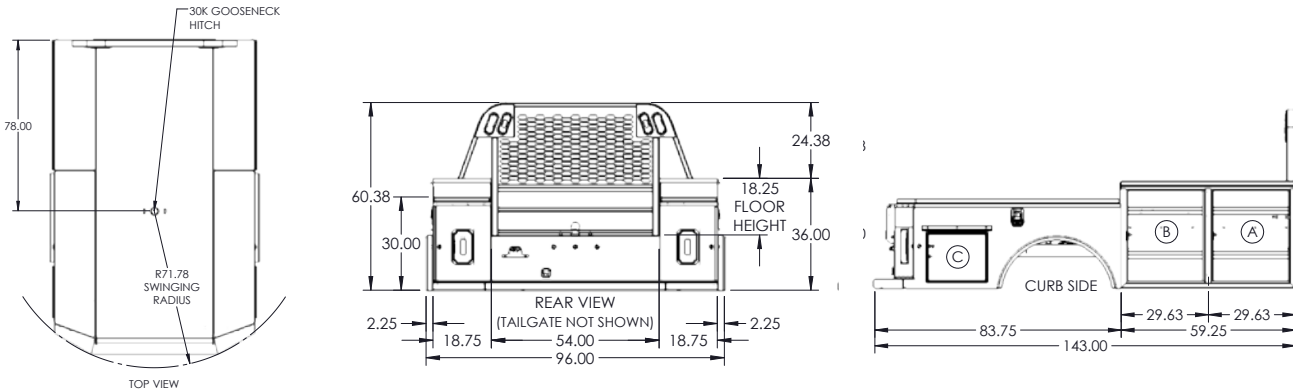


PGTC

MODEL	LENGTH	WIDTH	WEIGHT	APPLICATION	SWING RADIUS	LONG SILL SPACING
PGTC-738-F	7'3"	84"	936 lb.	40" CA SRW	60"	38"
PGTC-868-F	8'6"	84"	1,047 lb.	56" CA SRW	60"	38"
PGTC-9108	9'10"	84"	1,186 lb.	60" CA SRW	70"	34"
PGTC-86-F	8'6"	96"	1,148 lb.	56" CA DRW	63"	38"
PGTC-910	9'10"	96"	1,305 lb.	60" CA DRW	73"	34"
PGTC-1110	11'10"	96"	1,559 lb.	84" CA DRW	73"	34"

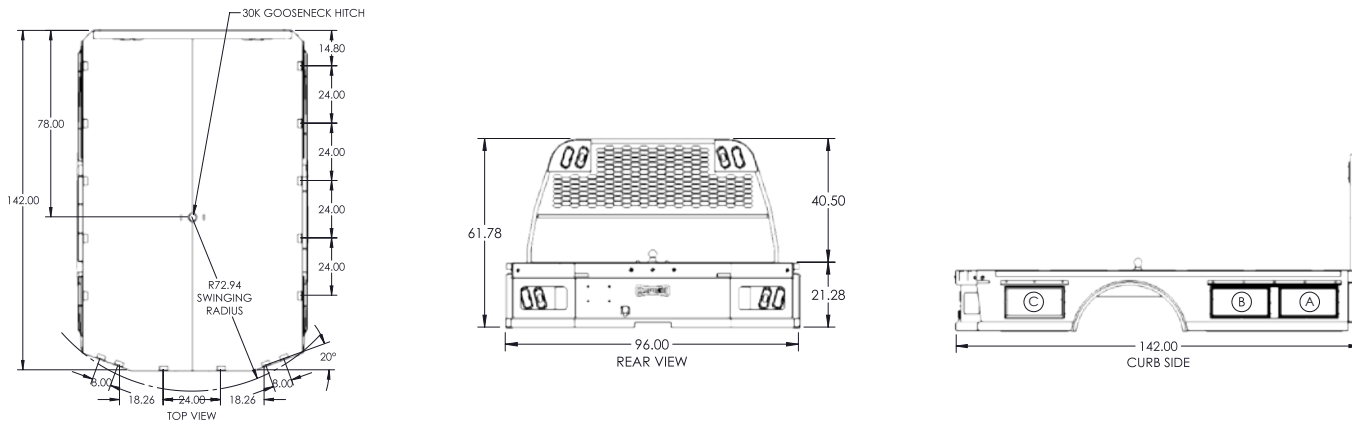

PGTE

MODEL	LENGTH	WIDTH	WEIGHT	APPLICATION	SWING RADIUS	LONG SILL SPACING
PGTE-738-F	7'3"	84.25"	940 lb.	40" CA SRW	60"	38"
PGTE-868-F	8'6"	84.25"	1,084 lb.	56" CA SRW	60"	38"
PGTE-9108	9'10"	84.25"	1,238 lb.	60" CA SRW	70"	34"
PGTE-86-F	8'6"	96"	1,182 lb.	56" CA DRW	63"	38"
PGTE-910	9'10"	96"	1,360 lb.	60" CA DRW	73"	34"
PGTE-1110	11'10"	96"	1,657 lb.	84" CA DRW	73"	34"

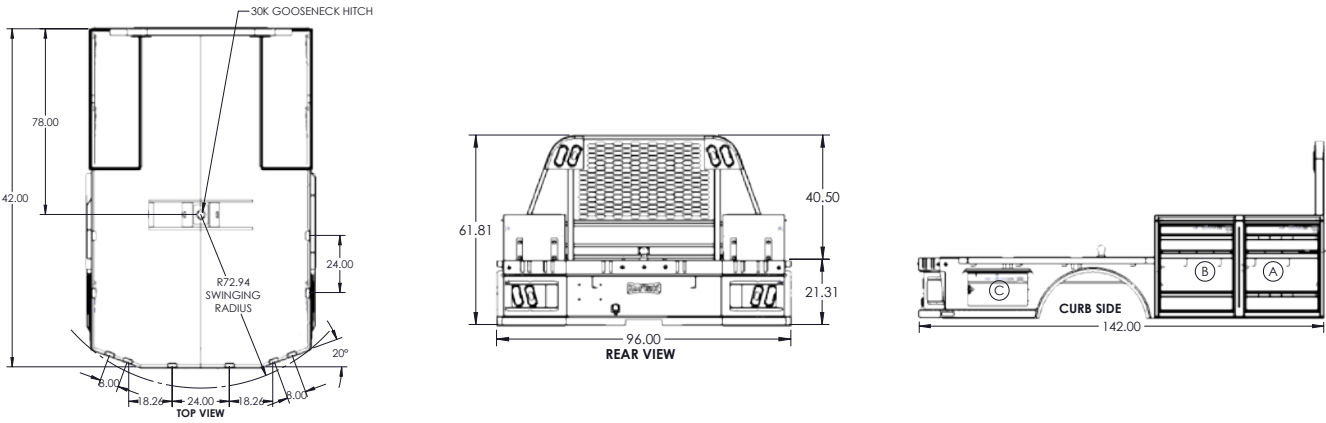



THREE YEAR LIMITED TIME WARRANTY



NO RUST
THROUGH



FREE FROM
DEFECTS IN
WORKMANSHIP



FREE FROM
DEFECTS IN
MATERIALS

COMMITMENT TO CORROSION RESISTANCE

Corrosion won't be a concern when you buy quality Knapheide products. To give you the best corrosion protection, we utilize a state-of-the-art, custom-designed, 12-step, SST cathodic electrodeposition finishing system, called "E-Coat."

It bonds prime paint to steel by an electroplating process to give you a superior coat of primer, resulting in better corrosion protection compared to spraying methods.

This system allows us to create products with the highest level of corrosion resistance available.

To learn more visit
www.knapheide.com/warranty

KNAPHEIDE®

SINCE 1848


★ AMERICA'S ★ **WORK TRUCK™**

The decisions you make about your equipment carry real weight. Your schedule, your team and your customers all depend on your tools to perform the way they should. That's why Knapheide goes beyond the build. By bringing innovative design, engineering, manufacturing and support together, you get a work solution that's ready from day one and stays consistent over time. American-made since 1848 and shaped by generations of experience, Knapheide fits the way you run your business and supports where you're headed next. It's a partnership you can count on every step of the way.

UNITED IN WORK.



The Knapheide Manufacturing Company
1848 Westphalia Strasse | Quincy, IL 62305
217-222-7131
www.knapheide.com



**FOLLOW US
LIKE US
TAG US**

